


# Required orientation of actuators

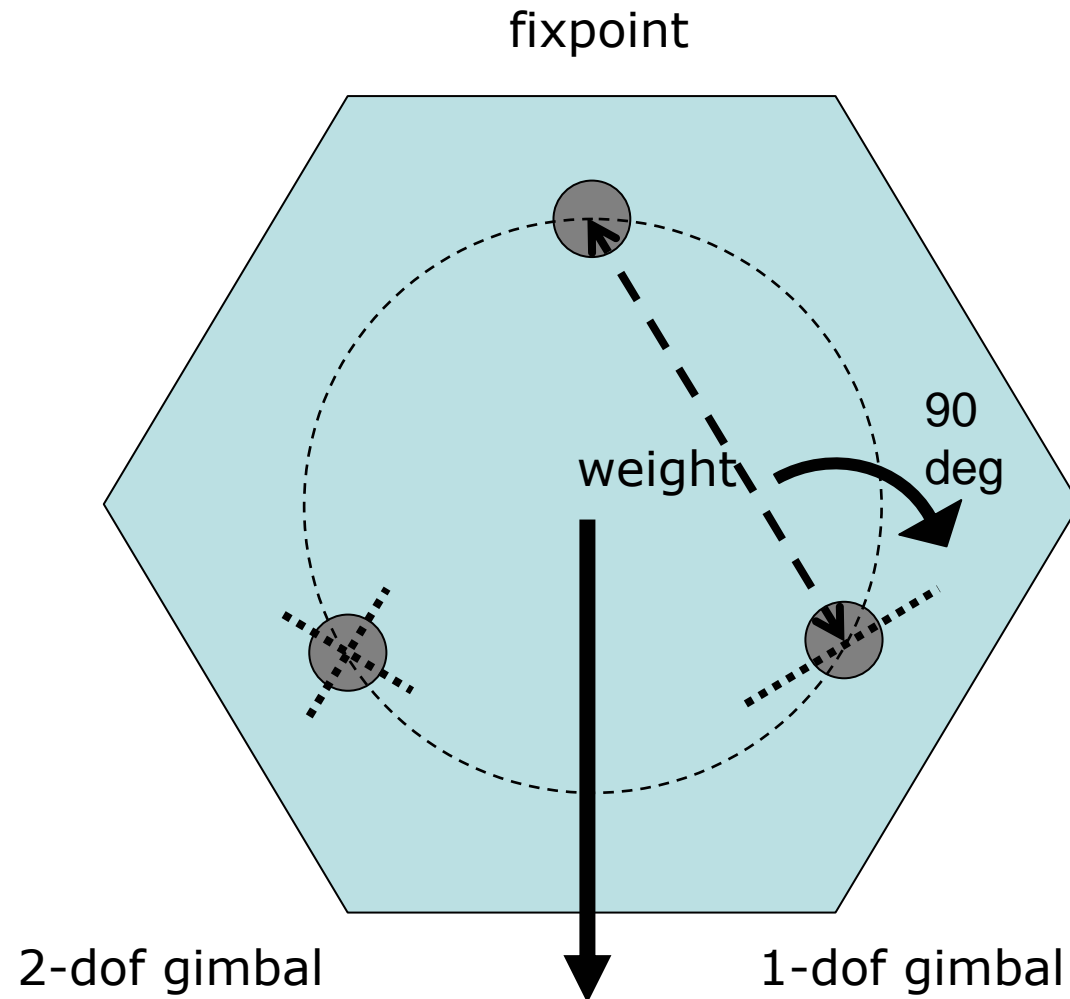

- Fixpoint has to be **directly above** (or below) the mirror's center of gravity.
- 1-dof gimbal axis has to be oriented **perpendicular** to the direction between the 1-dof actuator and the fixpoint.